

GPH 系列可空转立式耐酸碱泵

GPH SERIES IDLE RUNNING RESISTANT VERTICAL ACID AND ALKALI RESISTANT PUMP



**泵体采用FRPP、PVDF材质能耐高温耐腐蚀
 双层干式液封设计，可防止马达轴承被化学气体侵蚀
 无轴封设计，不会因空转而损坏
 适合蚀刻喷洗设备，废气洗涤塔冷却循环及搭配过滤器使用。**

Pump body adopts FRPP PVDF, material ability of high temperature and corrosion resistance.
 Double layer dry liquid seal design, can prevent the erosion of motor bearing by chemical gas.
 Seal-less is designed, not damaged by dry-running
 Suitable for etching spray cleaning equipment,
 Waste gas scrubber .Cooling loop and match filter to use .

型号识别 Model identification

GPH-15 E G-120-5 B

① ② ③ ④ ⑤ ⑥ ⑦


①系列代码 Series Symbol	GPH
②口径 Size	15:1/2" 20:3/4"
③O型圈材质 O-Ring Material	E:三元乙丙EPDM V:氟橡胶VITON N:丁晴橡胶NBR
④泵体材质 Casing Material	无代号No code:PP G:FRPP A:CPVC P:PVDF

⑤马力 Motor Power	50:1/15HP(50W) 90:1/8HP(90W) 120:1/6HP(120W)
⑥频率 Frequency	5:50HZ 6:60HZ
⑦底座外形 Base shape	B:标准型Standard Type F:方形Square Y:圆形Circle W:槽外式Groove External T:特殊定做Special Customized


规格表 Specifications

项目 Item 型号 Model	口径 Size (mm)	功率Power		50HZ			60HZ			重量 Weight(Kg)
		相数 Phase	HP	曲线 Curve	全扬程 Total head (m)	全流量 Total capacity (L/min)	曲线 Curve	全扬程 Total head (m)	全流量 Total capacity (L/min)	
GPH-15-50	15	1	1/15	A	3	50	A	4	75	4
GPH-15-50	15	3	1/15	A	3	50	A	4	75	4
GPH-15-90	15	1	1/8	B	3.5	60	B	5	85	4.5
GPH-15-90	15	3	1/8	B	3.5	60	B	5	85	4.5
GPH-15-120	15	1	1/6	C	3.8	70	C	6	100	4.8
GPH-15-120	15	3	1/6	C	3.8	70	C	6	100	4.8

外形尺寸图 Dimensional drawing, part drawing

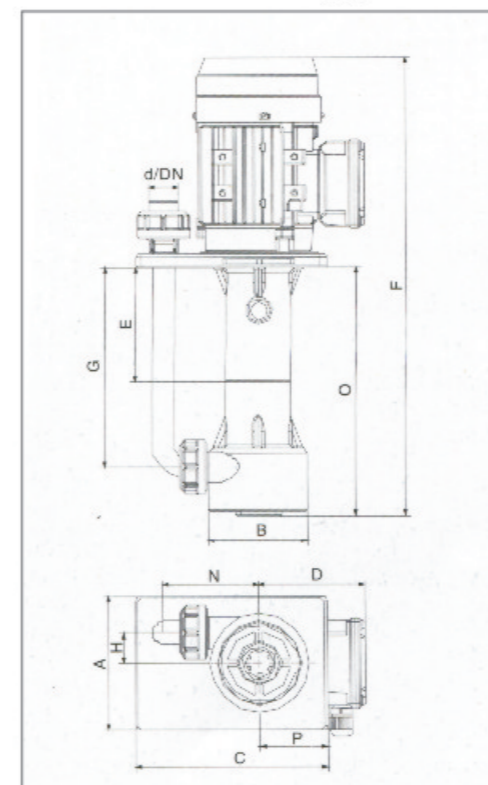

性能曲线图 Performance curves

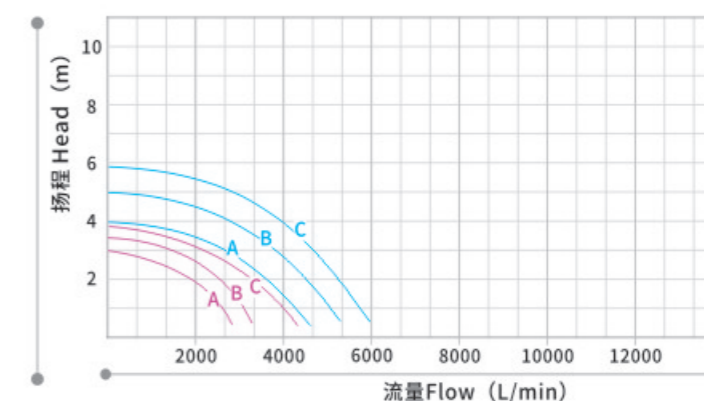

型号 Model	尺寸Size (mm)					
	A	B	C	D	E	F
GPH-15-50	120	88	170	94	102	407
GPH-15-90	120	88	170	94	102	407
GPH-15-120	120	88	170	94	102	407

型号 Model	尺寸Size (mm)				
	G	H	N	P	O
GPH-15-50	177	27	85	60	220
GPH-15-90	177	27	85	60	220
GPH-15-120	177	27	85	60	220